


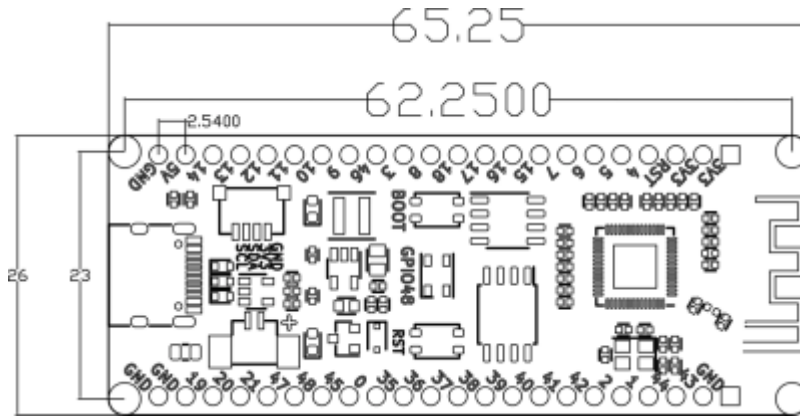

- [바나나 파이 리프 ESP32 S3 실행 가능한 Micropython 저전력 에너지 절약 마이크로 컨트롤러, IoT 개발을 위해 설계 @aliexpress.com](#)
- [BPI-Leaf-S3](#)
- 1 * JST SH 1mm 4-Pin Socket, support I2C
- 1 * MX 1.25mm 2-Pin Socket support charging
- [USB Host @ESPRESSIF](#)
- [USB Host Library Example @github](#)


TTGO T-DISPLAY

- 2 pin JST SH 1.25 connector.
- [LILYGO® TTGO T-Display ESP32 WiFi and Bluetooth Module Development Board For Arduino 1.14 Inch LCD](#)
- [LILYGO® TTGO T-Display ESP32 WiFi and Bluetooth Module Development Board For Arduino 1.14 Inch LCD\(1\)\(1\)\(1\)\(1\)](#)
- [How to power off TTGO T-Display while charging? @reddit](#)
- [Documents on ESP32 and TTGO T-Display](#)
- [LilyGO TTGO T-display ESP32 @Joel's code snippets pages](#)

PINS


ESP32 DEVKIT V1 – DOIT


version with 36 GPIOs

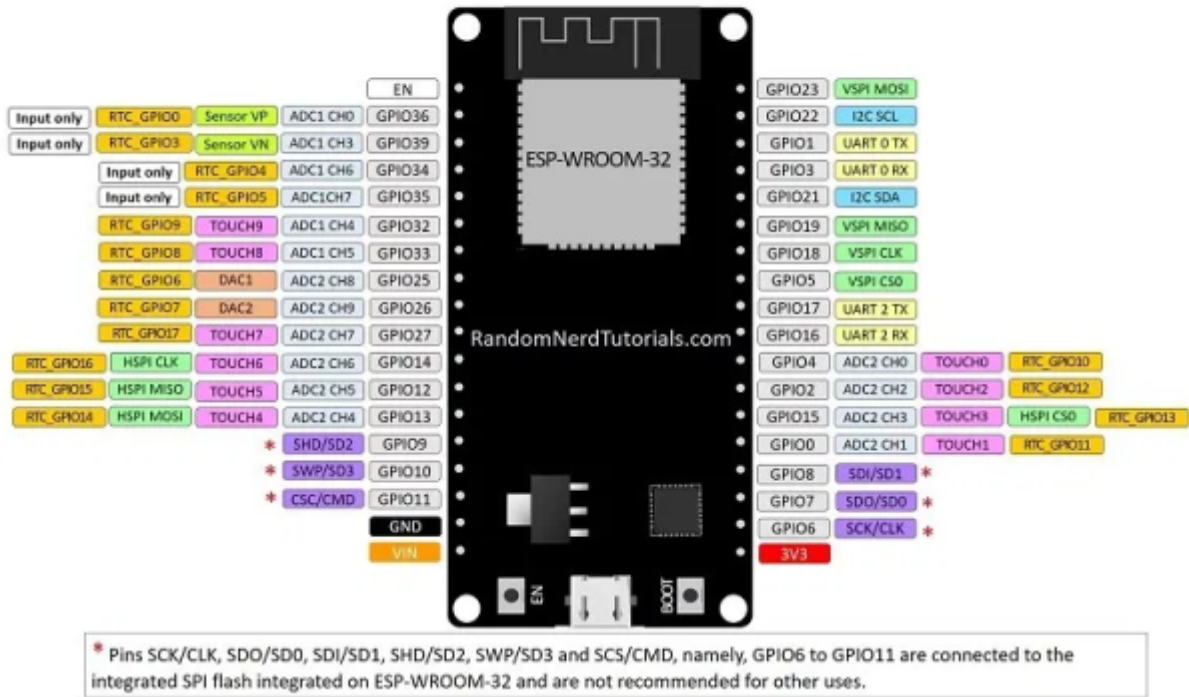

ESP32 DEVKIT V1 – DOIT

version with 30 GPIOs

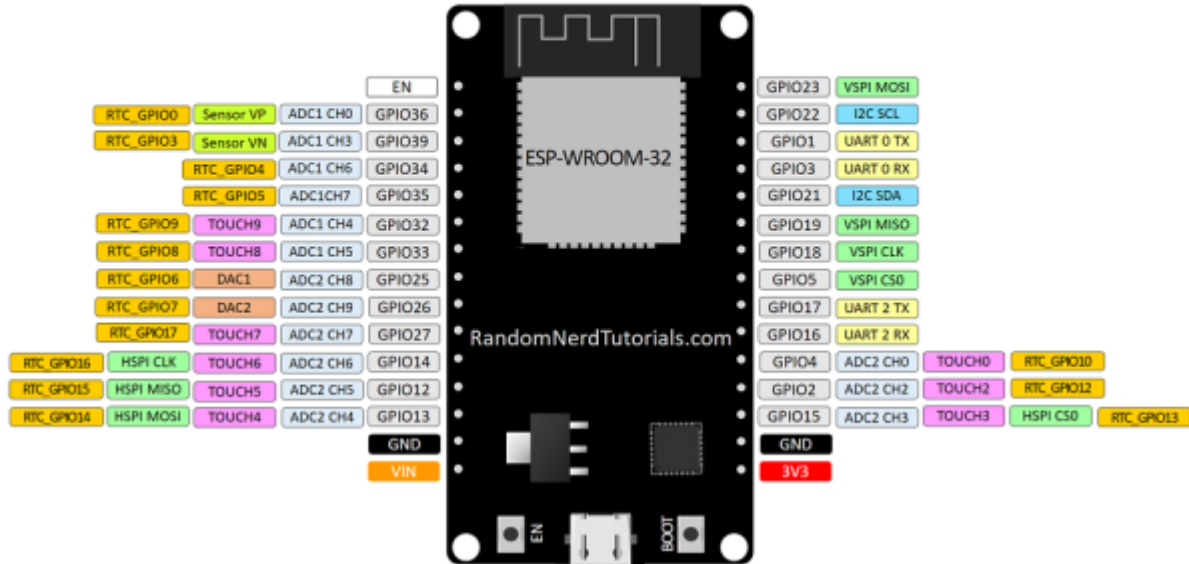



Last update: **2022/12/09 23:51**

